

IMP-IF1

Impulse Interface Adapter



The IMP-IF1 interface adapter is suitable for interfacing MTE reference standards with meters having retransmitting contacts, open-collector transistor outputs or true S0-outputs to allow full testing of meters with these types of outputs interfaces.

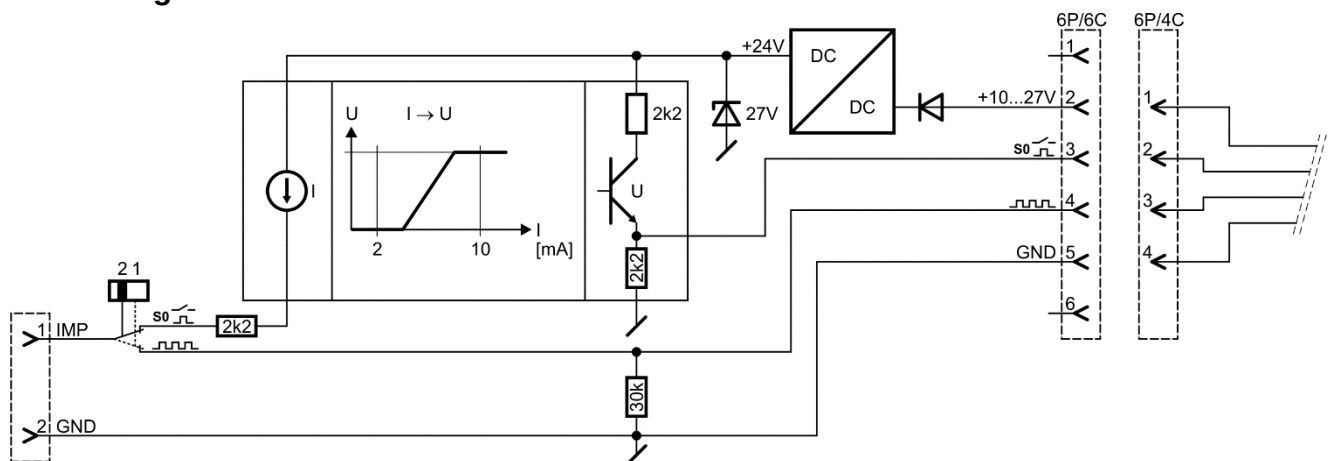
IMP-IF 1 functions

- Active input for testing S0 outputs, according to the DIN 43864 standard

- Input for testing passive pulse outputs such relay contacts prone to bounce or open collector transistor outputs
- Input for testing active outputs

The required function may be selected using the slide switch. For the output connector, a suitable 1:1 interface cable with a 6P/4-adapter should be used. (see table below) The two cables with 1.5 mm plugs are removable so that damaged cables may be replaced.

Block diagram



Technical data

Supply: +10 ... +27 V / I_{max} < 60 mA / P_{max} < 0.6 W

S0  Input:

Suitable for slow inputs, S0-inputs, passive free contacts or open-collector outputs

Output level: U (IMP-GND) = +24 V (independent of the supply voltage)

Switching time: according to the S0 standard

f_{max}: 50 Hz

Pulse current | S0  pulse output

I(IMP) ≤ 2 mA | LOW

I(IMP) ≥ 10 mA | HIGH

LOW / HIGH range: typically 3 ... 5 mA

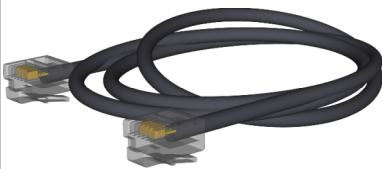




 Input:

Suitable for fast, active pulses. This input is directly connected to the  output.

Input resistance: 30 kΩ (GND-IMP) (assumes no parallel burden is connected at the output)

f_{max}: 200 kHz

IMP-IF1 interface cables

For use with:		Connector type (view on plug)	Connection details
- SMM 397 - SMM 400		 Length: 1 m	 Pin 1 ⇒ Supply Pin 2 ⇒ Slow input Pin 3 ⇒ Fast input Pin 4 ⇒ GND
- K2006 - PRS 400.3 - CALPORT 300 - PWS 3.3 - PWS 2.3 PLUS - CheckMeter 2.1 - CheckMeter 2.3 - PTS 2.1 C - PTS 2.3 C - PTS 3.1 C - PTS 3.3 C		 Length: 2 m	 Pin 1 ⇒ Supply Pin 2 ⇒ Slow input Pin 3 ⇒ Fast input Pin 4 ⇒ GND Pin 5 ⇒ not used
- CheckSystem 2.1 - CheckSystem 2.3		 Length: 2 m	 Pin 1 ⇒ GND Pin 2 ⇒ Supply Pin 7 ⇒ Impulse
Testing cable		2 mm plugs / Length: 150 mm Multi Contact AG	Red ⇒ Impulse Black ⇒ GND